## ADC AD-333

### 30-lb x 2 Capacity OPL Dryer

#### **Standard Features:**

- 30-lb. x 2 capacity
- 10.1 cu. ft. volume
- 72,000 Btu/hr heat input, 400 cfm airflow per pocket
- Partial axial airflow
- Steel door with gasketless glass
- Two 8" diameter top exhaust connection
- Optional single 10" exhaust connection
- 1/2" gas connection per pocket
- Fits through a standard 36" door
- Available in gas heat
- Available in gray or white front and cabinet



AD-333 OPL Stack Dryer

#### Why Purchase ADC AD-333?



#### **Engineer Driven Design That is Built to Last**

Our dryers showcase ADC's engineer-driven approach to design. Bearings are permanently lubricated on the motor and drive system. There are no chains used at ADC; rather, we use V-belts and pulleys that simplify serviceability and ensure smooth, quiet, and trouble free operation. Our dryer cabinets are electrostatically powder-painted inside and out then baked at 420-degrees fahrenheit before final assembly - ensuring the hardest surface and the longest lasting finish in the industry.

#### **Rugged Steel Door with Gasketless Door Glass**

Our dryer doors are one solid piece of steel with gasketless glass. This eliminates the issue of glass falling out due to wear and tear on rubber gaskets that some manufacturers use to secure their glass. The security and durability that gasketless glass provides is essential to a successful laundromat operation.

#### **More for Less**

The AD-333 incorporates all the state-of-the-art design features from the leader in stack dryer design-with simple controls, an easy-to-read LED screen and a large lightweight lint drawer that is accessible and easy to clean--only requiring cleaning once a day. It's fine stainless steel lint screen is standard. Available for coin or card ready, the AD-333 gives you all the benefits of ADC quality engineering at a low cost

Your local ADC independent authorized distributor




# ADC AD-333


AD-333 Specifications					
Tumbler Capacity (dry weight) (per pocket)	30 lbs. (13.60 kg)				
Tumbler Diameter	27-1/4" (69.21 cm)				
Tumbler Depth	30" (76.20 cm)				
Tumbler Volume (per pocket)	10.1 cu ft (286 L)				
Tumbler/Drive Motor (per pocket)	1/2 hp (0.37 kW)				
Blower/Fan Motor	N/A				
Door Opening (Diameter)	21-1/2" (54.61 cm)				
Door Sill Height top pocket bottom pocket	52-7/8" (134.3 cm) 14-1/4" (36.2 cm)				
Dryers per 20'/40' Container	11 / 22				
Dryers per 48'/53'Truck	30 / 33				
Width	29-3/4" (75.4 cm)				
Depth	52-1/4" (132.6 cm)				
Height	78-1/4" (198.8 cm)				
Airflow 60 Hz 50 Hz	400 cfm (11.3 cmm) 340 cfm (9.6 cmm)				
Exhaust Connection	8" (20.32 cm)				
GAS MODEL:					
Voltage Available Approx. Net Wt. Approx. Ship Wt. Heat Input (per pocket) Inlet Pipe Connection (per pocket)	120-240v 1,3ø 2,3w 675 lbs (306 kg) 710 lbs (322 kg) 72,000 btu/hr (18,143 kcal/hr) 1/2" F.N.P.T.				

Specifications in parentheses are metric equivalents.

9/10/15

	Electrical Service Specifications							
		GAS (Non-Reversing)						
	SERVICE PHASE	WIRE	APPROX AMP DRAW		CIRCUIT			
	VOLTAGE	VOLTAGE PHASE	SERVICE	60 Hz	50 Hz	BREAKER		
	120	1ø	2	8.7		15		
	208	1ø	2	5.2		15		
	220	1ø	2	4.9	5	15		
	230	1ø	2	4.8		15		
	240	1ø	2	4.8		15		
	480	3ø	3	2.1		15		



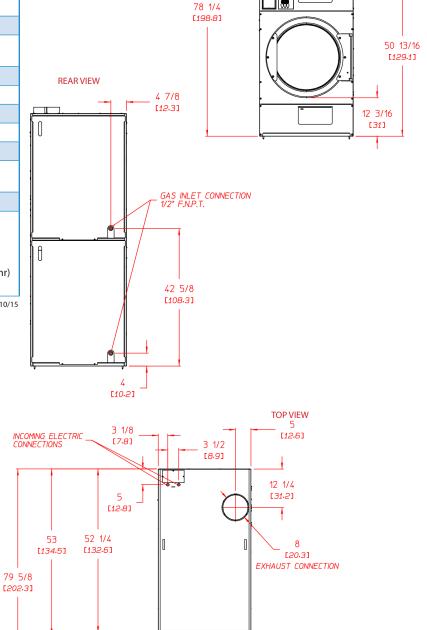

FRONT VIEW



88 Currant Road Fall River, MA 02720-4781 • 508.678.9000 • Fax: 508.678.9447 • Email: sales@amdry.com

29 3/4

MAIN DOOR OPEN

P/N 451060 Rev. 9/10/15